

Introducing SP-15 Series

Smart Converter

SP-15



maestrotek
innovations



CloudXTU



SP-15 Series Smart Converter

FEATURES

- 1 x Ethernet
- 4 x RS485 / 422




PRODUCT OVERVIEW

- SP-15 Smart Converter works as programless Modbus TCP to Modbus RTU Converter.
- Settable baud rate for all serial ports with auto direction control.
- Easy diagnostics

SPECIFICATIONS

Parameter	Description
Wireless / Connectivity	WiFi 802.11 a/b/g/n (Optional)
Communication Interface	4S Model : 4x RS485 / 422 (4W/2W) 1 x 10/100Mbps Ethernet / 2E Model : 2 x 10/100Mbps Ethernet
Power Input	Input Supply : 24VDC +/- 10%
Operating Temperature	0 - 60 Deg. C
Enclosure / Protection	DIN Rail / Wall mount IP30
Communication Drivers	Master / Client drivers : Modbus RTU Slave / Server : Modbus-TCP

PRODUCT IMAGES

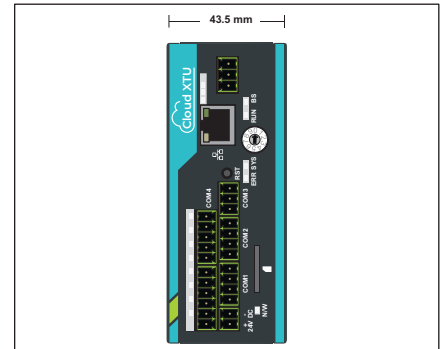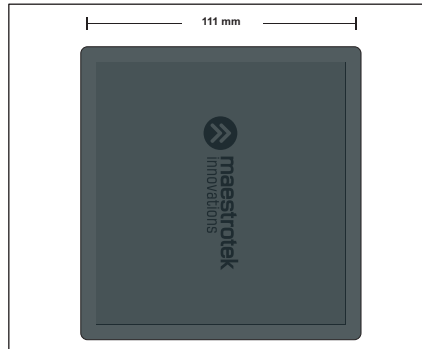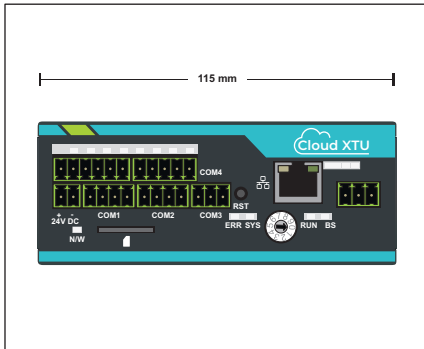

MODEL SELECTION

SP-15 - $\frac{x}{1}$ - $\frac{x}{2}$

1. IOs

4S-2E :- 2 x Ethernet, 4 x Serial port RS485/422 (4W/2W)
4S :- 1 x Ethernet, 4 x Serial port RS485/422 (4W/2W)

2. Connectivity

WL :- WiFi Client / AP
None :- No Wireless Connectivity

Models :

SP-154S-WL 1 x LAN, 4 Serial Modbus TCP to RTU Converter, WiFi Client / AP
SP-154S-2E-WL 2 x LAN, 4 Serial Modbus TCP to RTU Converter, WiFi Client / AP
SP-154S 1 x LAN, 4 Serial Modbus TCP to RTU Converter
SP-154S-2E 2 x LAN, 4 Serial Modbus TCP to RTU Converter